


1. Find back panels (Fig. A).

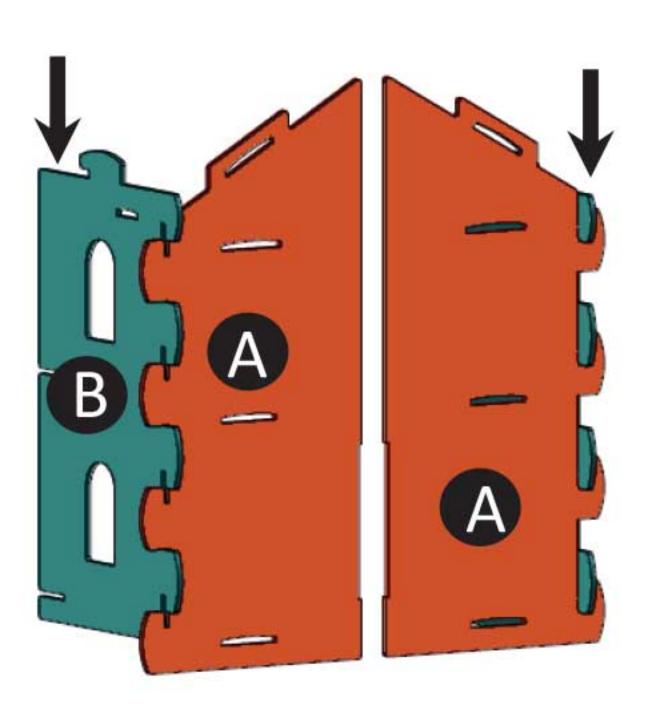


2. Slide one side panel (Fig. B) per back panel (Fig. A) to interlock on the corners. Every piece should slide easily into another piece.


(Do not force, twist, or use tools

to forcibly assemble or

disassemble.)

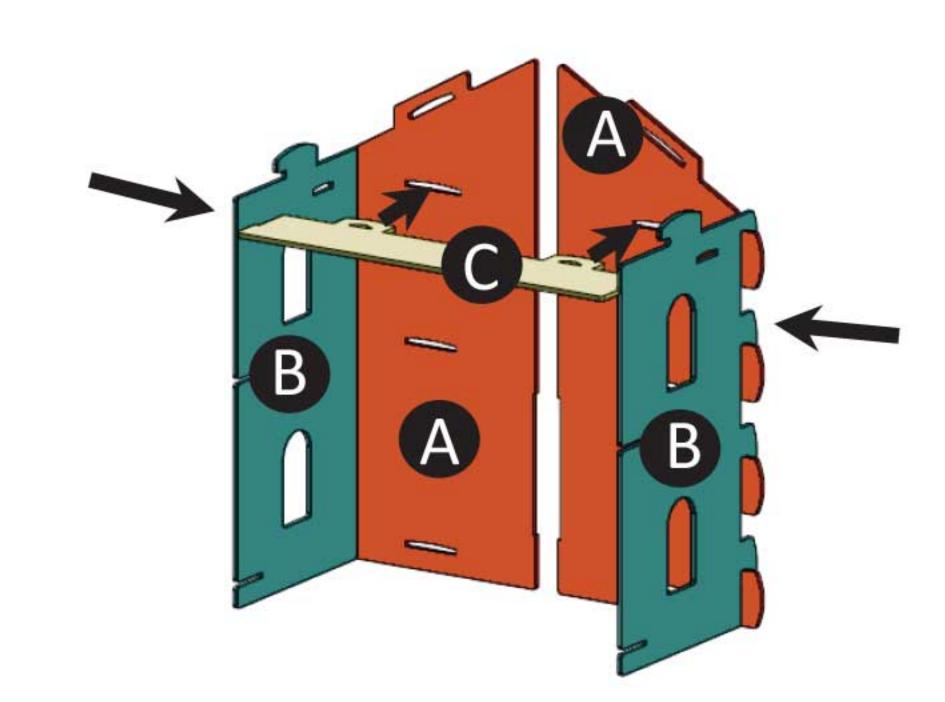


3. Insert the loft floor (Fig. C) into back panels (Fig. A) and push two side panels (Fig. B) towards each other to lock in.

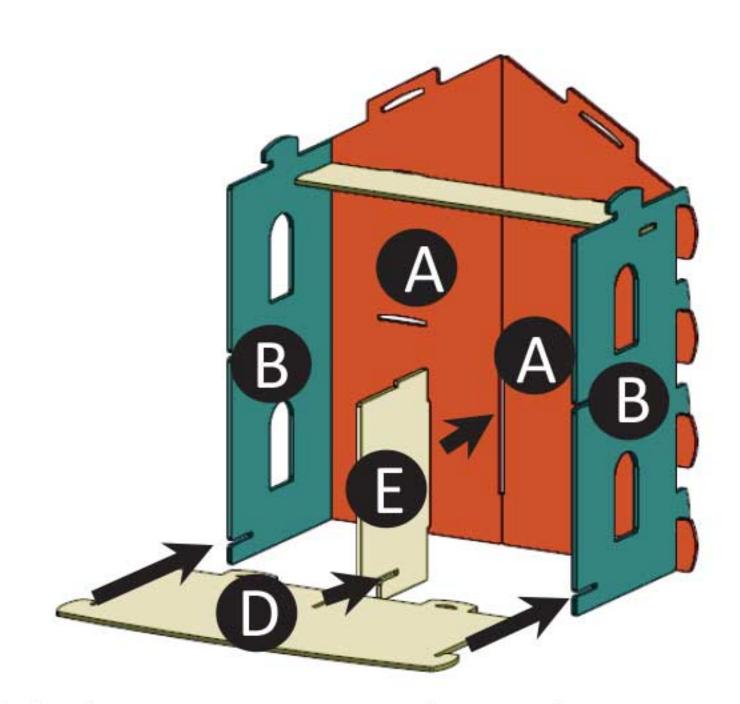


4. Slide lower partition (Fig. E) onto one of the floor panels (Fig. D). Then, slide partition and floor piece into back (Fig. A) and side panels (Fig. B).

Note: Always push floor panels in equally on both sides simultaneously (not at angle).


G

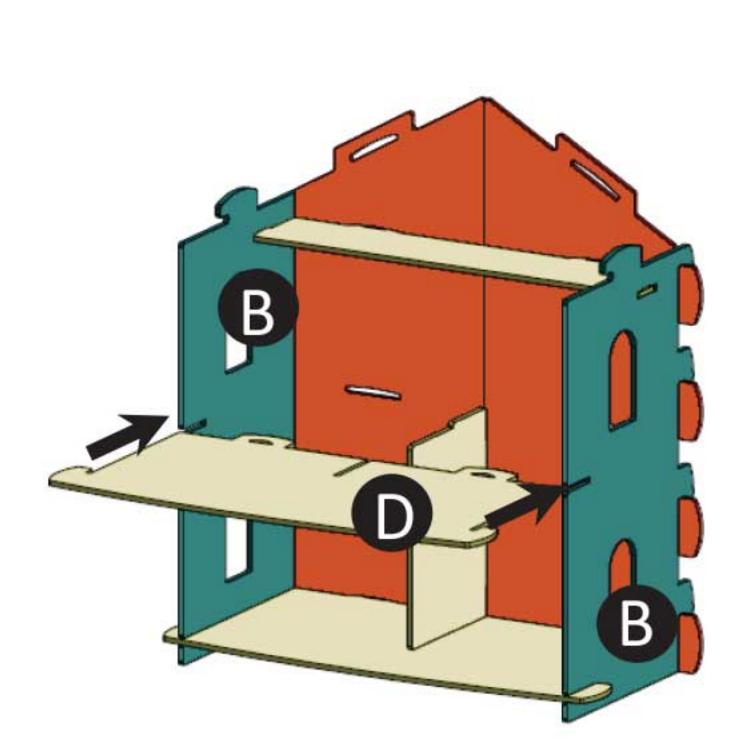

5. Insert second floor (Fig. D) into the side panels (Fig. B).

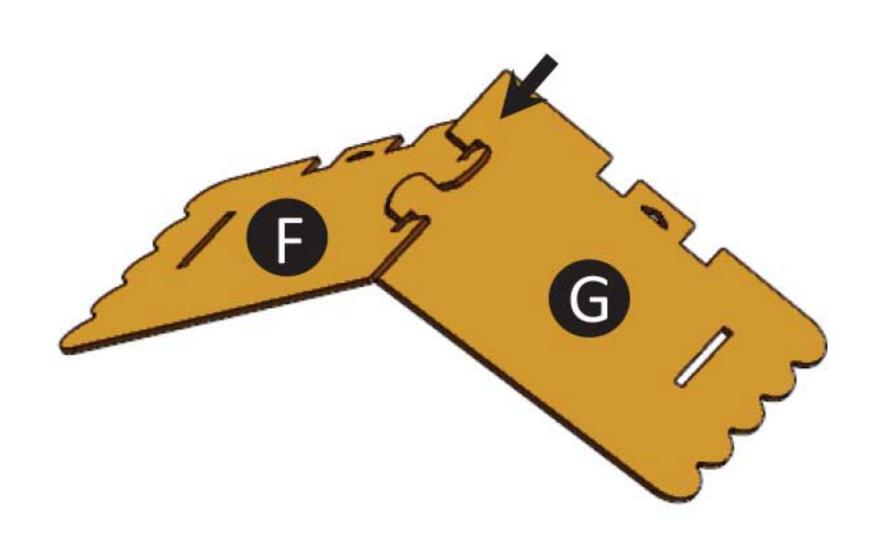

6. Interlock two roof panels (Fig. F and G) apart from the structure.

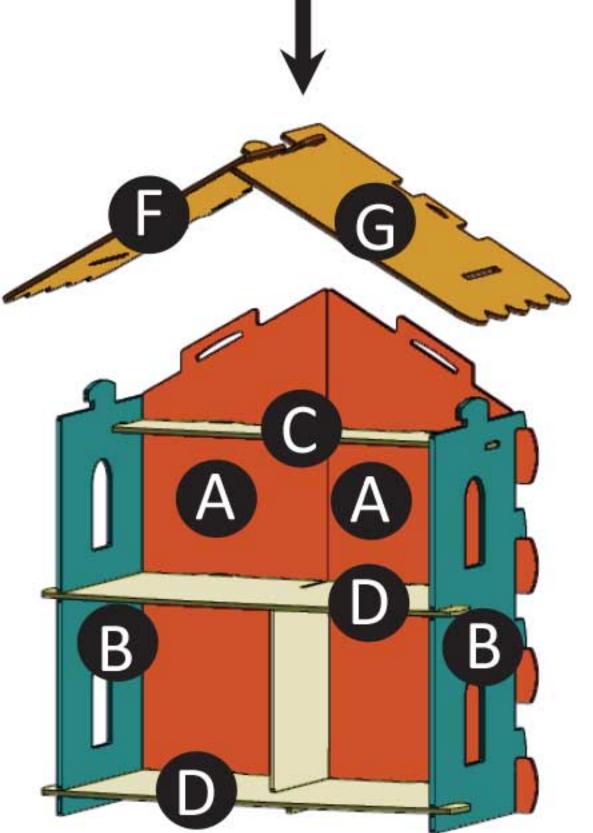


panels (Fig. D) along the back side of the house.

7. Fit roof panel slots (Fig. F and G) onto side wall tabs (Fig. B) at the same time. Then, slide roof tabs into back panels (Fig. A) at the same time. Push dowel rods through holes in the tabs of the roof (Fig. F and G), and two floor





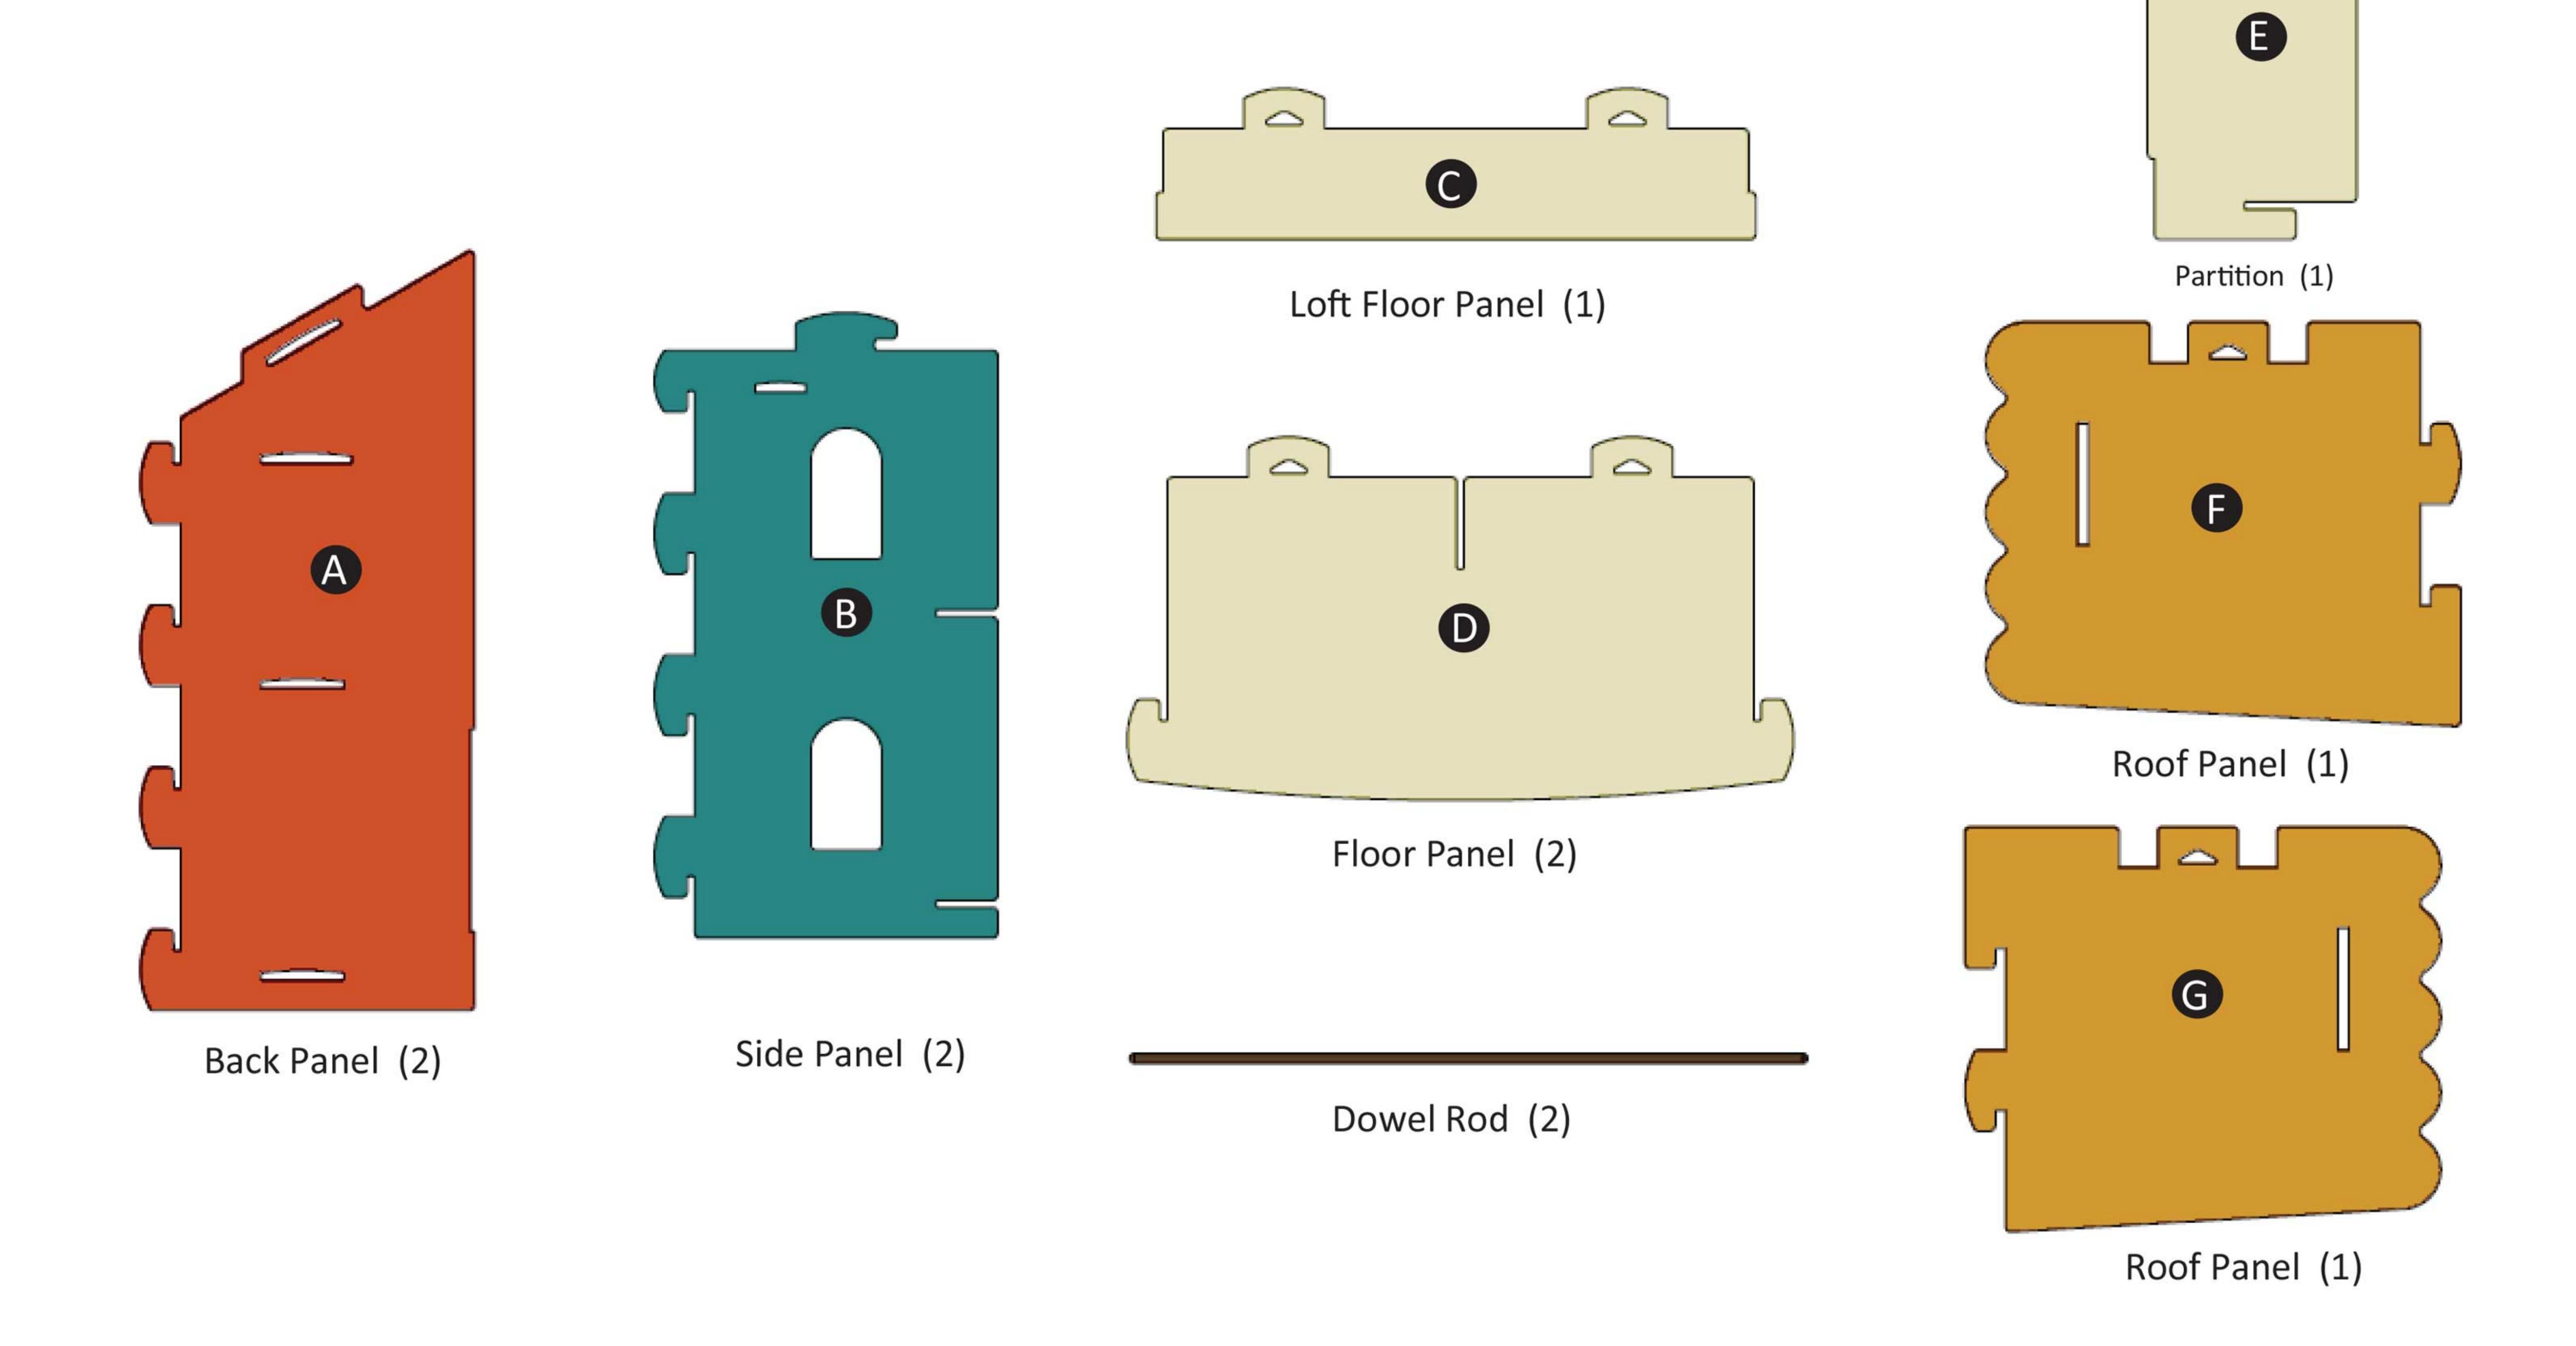



Adult assembly required. No human sitting, standing, or leaning on dollhouse components at any time (dolls only).